

95183104

OPERATIONS AND MAINTENANCE MANUAL APPENDIX B

BASIN F INTERIM RESPONSE ACTION
GROUND AND SURFACE-WATER MONITORING PROGRAM TECHNICAL PLAN

June 4, 1992

PREPARED BY

R.L. STOLLAR & ASSOCIATES, INC.
HARDING LAWSON ASSOCIATES
DATACHEM LABORATORIES
MIDWEST RESEARCH INSTITUTE

PREPARED FOR


PROGRAM MANAGER FOR ROCKY MOUNTAIN ARSENAL

19960509 016

THIS DOCUMENT IS INTENDED TO COMPLY WITH THE NATIONAL ENVIRONMENTAL
POLICY ACT OF 1969.

THE INFORMATION AND CONCLUSIONS PRESENTED IN THIS REPORT REPRESENT
THE OFFICIAL POSITION OF THE DEPARTMENT OF THE ARMY UNLESS EXPRESSLY
MODIFIED BY A SUBSEQUENT DOCUMENT. THIS REPORT CONSTITUTES THE
RELEVANT PORTION OF THE ADMINISTRATION RECORD FOR THIS CERCLA
OPERABLE UNIT.

DISCLAIMER NOTICE

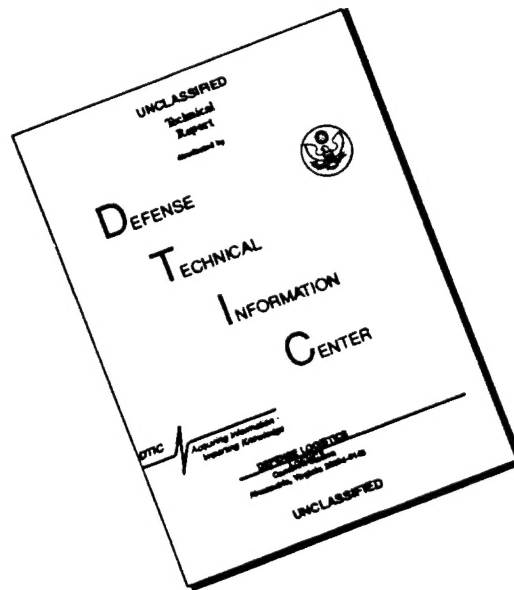

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

TABLE OF CONTENTS

	<u>Page</u>
LIST OF TABLES	ii
LIST OF FIGURES	iii
1.0 INTRODUCTION	1
1.1 COMPREHENSIVE MONITORING PROGRAM	1
1.2 PURPOSE	2
2.0 GROUNDWATER MONITORING PROGRAM	3
3.0 SURFACE-WATER MONITORING PROGRAM	4
4.0 LABORATORY ANALYTICAL PROGRAM	5
5.0 MAINTENANCE PROGRAM	6
6.0 HEALTH AND SAFETY	8
7.0 DATA MANAGEMENT	9
8.0 QUALITY ASSURANCE	10
9.0 REPORTING AND DATA ASSESSMENT	11
10.0 REFERENCES	12

LIST OF TABLES

<u>Table No.</u>		<u>Page</u>
2.1	Groundwater Quality Monitoring Network for Basin F IRA Area	3A
2.2	Quarterly Water-level Monitoring Network for Basin F IRA Area	3B
4.1	Target Analyte List for Groundwater and Surface-Water Sampling in the Basin F IRA Area	5A

LIST OF FIGURES

<u>Figure No.</u>		<u>Page</u>
2.1	Groundwater Quality Monitoring Well Locations for Basin F Interim Response Action Area	3C
2.2	Water-Level Monitoring Well Locations for Basin F IRA Area	3D
3.1	Basin F Gaging Station	4A

APPENDIX B

GROUND AND SURFACE-WATER MONITORING PROGRAM
TECHNICAL PLAN

1.0 INTRODUCTION

This groundwater and surface-water monitoring plan has been prepared by R.L. Stollar and Associates, Inc. (Stollar), and Harding Lawson Associates (HLA) for the Program Manager for Rocky Mountain Arsenal (PMRMA) for groundwater and surface-water monitoring activities at the Basin F Interim Response Action (IRA) area at Rocky Mountain Arsenal (RMA). The plan is a subpart of the PMRMA groundwater and surface-water elements of the Comprehensive Monitoring Program (CMP).

1.1 COMPREHENSIVE MONITORING PROGRAM

The purpose of the CMP is to monitor and evaluate data generated during groundwater and surface-water monitoring activities at RMA and adjacent offpost areas on a long-term basis. The groundwater element of the CMP provides both regional and site-specific monitoring and evaluation of water levels and water quality. Groundwater wells in the Basin F IRA area are monitored four times per year. The surface-water element of the CMP provides monitoring in the Basin F IRA area when sufficient quantities of surface runoff exist for sampling and/or gaging.

The Basin F IRA provided for the construction of temporary containment structures to hold the contaminated liquid, soil, settled solids, liner, and overburden from Basin F. The Basin F IRA area consists of the following structures: a 92.7-acre surface depression formerly occupied by Basin F that has been excavated and covered with a contoured low-permeability clay cap; a 16-acre double-lined, enclosed waste pile located within the historic perimeter of the basin; a double-lined waste pile leachate collection pond adjacent to the waste pile; two double-lined liquid storage ponds (Ponds A and B) immediately north of the basin; and three carbon steel holding tanks located east of the basin. These structures were installed in the Basin F IRA area during 1988 and 1989. Water monitoring activities will be performed in the Basin F IA area in an attempt to determine the effects of installation on the water table and contaminant migration.

Evaluations of the groundwater data are presented in annual CMP groundwater reports (Stollar and others, 1989, 1990a, 1991). Evaluations of the surface-water data are presented in

annual CMP surface-water reports (Stollar and others, 1990b, 1992). The data and evaluations in these reports are utilized to facilitate the planning of final remediation in the Basin F IRA area and the operation and maintenance of the Basin F IRA structures.

The principle objectives of the groundwater and surface-water elements of the CMP, relative to the Basin F IRA area, are as follows:

- Provide groundwater and surface-water monitoring that specifically supports the operation of the Basin F IRA area and satisfies substantive regulatory requirements.
- Provide data necessary to evaluate the present and project the future hydrologic conditions and migration of contaminants by groundwater and surface-water mechanisms.
- Provide data for design, construction, and operation of the Final Remedial Action.

To achieve these objectives, several technical tasks are anticipated. These tasks include, but may not be limited to, the following:

- Review hydrogeologic data and engineering as-built diagrams of the Basin F area.
- Execute the Basin F IRA area monitoring program utilizing PMRMA sampling and analytical procedures.
- Check and transmit the data following each collection effort. This includes data validation and submission to the U.S. Department of the Army's (Army's) environmental database.
- Assess the data resulting from each collection effort with respect to possible adjustments in the monitoring program during subsequent events.

1.2 PURPOSE

The purpose of the groundwater and surface-water monitoring plan is to detail monitoring activities in the Basin F IRA area at RMA as they relate to the CMP. The groundwater monitoring program is presented in Section 2.0, and the surface-water monitoring program is presented in Section 3.0. Information relative to both monitoring programs, including the laboratory monitoring program, maintenance program, health and safety, data management, quality assurance, and reporting and data assessment, is presented in Sections 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, and 9.0, respectively.

2.0 GROUNDWATER MONITORING PROGRAM

Groundwater is monitored in the Basin F IRA area as a site-specific component of the CMP. Water quality in the Basin F IRA area is assessed by analyzing groundwater samples collected from alluvial and Denver Formation wells located both upgradient and downgradient of the historic basin perimeter and new structures built as components of the Basin F IRA.

Wells shown in Figure 2.1 are screened within the unconfined flow system or the confined Denver Formation flow system. The unconfined flow system includes saturated alluvium, eolian deposits, and subcropping parts of the Denver Formation where lithologic data indicate the presence of sandstone or relatively permeable material. In areas where alluvial and eolian deposits are unsaturated, the unconfined flow system consists solely of sandstone and fractured or weathered rock within the shallow parts of the Denver Formation. The confined flow system consists of strata within the Denver Formation where water is under greater than atmospheric pressure.

The wells listed in Table 2.1 and shown in Figure 2.1 are sampled annually. A subset of these wells is also sampled quarterly. Wells sampled on a quarterly basis include wells 23049, 23095, 23142, 23220, 23239, 26015, 26017, 26020, 26041, 26073, 26085, 26127, 26160, 26162, 26163, 26164, 26168, 26169, 26170, and 27016. Wells were selected to be in the quarterly water-quality sampling network on the basis of a combination of their location with respect to Basin F IRA structures, frequency of past water quality analyses, and a history of high level contaminant concentrations. Water levels in the unconfined flow system and confined Denver Formation flow system in the Basin F IRA area are measured quarterly utilizing the 246 wells listed in Table 2.2 and shown in Figure 2.2.

Table 2.1: Groundwater Quality Monitoring Network for Basin F IRA Area

<u>Section</u>	<u>Total No. of Wells</u>	<u>Well Designations - Unconfined Alluvial Wells</u>
23	10	049, 095, 142, 179, 188, 191, 220, 237, 239, 241
26	27	015, 017, 019, 020, 041, 071, 073, 083, 085, 127, 133, 148, 157, 158, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 173
27	1	016

Total Alluvial Wells = 38

<u>Section</u>	<u>Total No. of Wells</u>	<u>Well Designations - Confined Denver Formation Wells</u>
23	8	180, 181, 189, 190, 192, 193, 221, 222
26	15	066, 067, 072, 075, 084, 086, 129, 140, 142, 146, 149, 150, 153, 155, 156

Total Denver Wells = 23

IRA = Interim Response Action
No. = number

20006,110.10 - CWMP
1119060392

Table 2.2: Quarterly Water-level Monitoring Network for Basin F IRA Area


Section	Well Designations - Unconfined Alluvial Wells
23	002, 004, 007, 010, 011, 013, 016, 029, 030, 036, 039, 040, 045, 046, 049, 057, 059, 072, 079, 084, 085, 092, 094, 095, 102, 108, 110, 118, 119, 120, 121, 123, 134, 135, 140, 142, 146, 150, 157, 160, 166, 178, 179, 188, 191, 196, 197, 198, 205, 207, 208, 211, 220, 223, 231, 232, 237, 238, 239, 241
26	006, 010, 015, 016, 017, 019, 020, 040, 046, 048, 049, 050, 062, 065, 068, 073, 076, 081, 083, 085, 088, 091, 093, 124, 127, 133, 143, 145, 148, 157, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 173
27	002, 003, 004, 005, 006, 007, 009, 010, 011, 016, 018, 025, 031, 037, 040, 041, 042, 043, 044, 045, 051, 053, 062, 063, 064, 066, 068, 070, 071, 072, 074, 075, 077, 080, 081, 082, 083, 085, 086


Total Alluvial Wells = 142

Section	Well Designations - Confined Denver Formation Wells
23	053, 055, 106, 125, 144, 161, 176, 177, 180, 181, 182, 183, 184, 185, 186, 187, 189, 190, 192, 193, 199, 200, 201, 202, 203, 204, 209, 218, 219, 221, 222, 224, 225, 226, 227, 228, 229, 230, 233, 234, 235, 236
26	023, 024, 025, 026, 027, 028, 029, 041, 047, 051, 055, 056, 057, 058, 060, 061, 063, 064, 066, 067, 069, 072, 074, 075, 077, 079, 080, 082, 084, 086, 089, 090, 092, 094, 096, 097, 123, 128, 129, 130, 134, 135, 136, 140, 141, 142, 144, 146, 147, 149, 150, 151, 152, 153, 155, 156
27	049, 054, 055, 057, 058, 084

Total Denver Formation Wells = 104


IRA = Interim Response Action

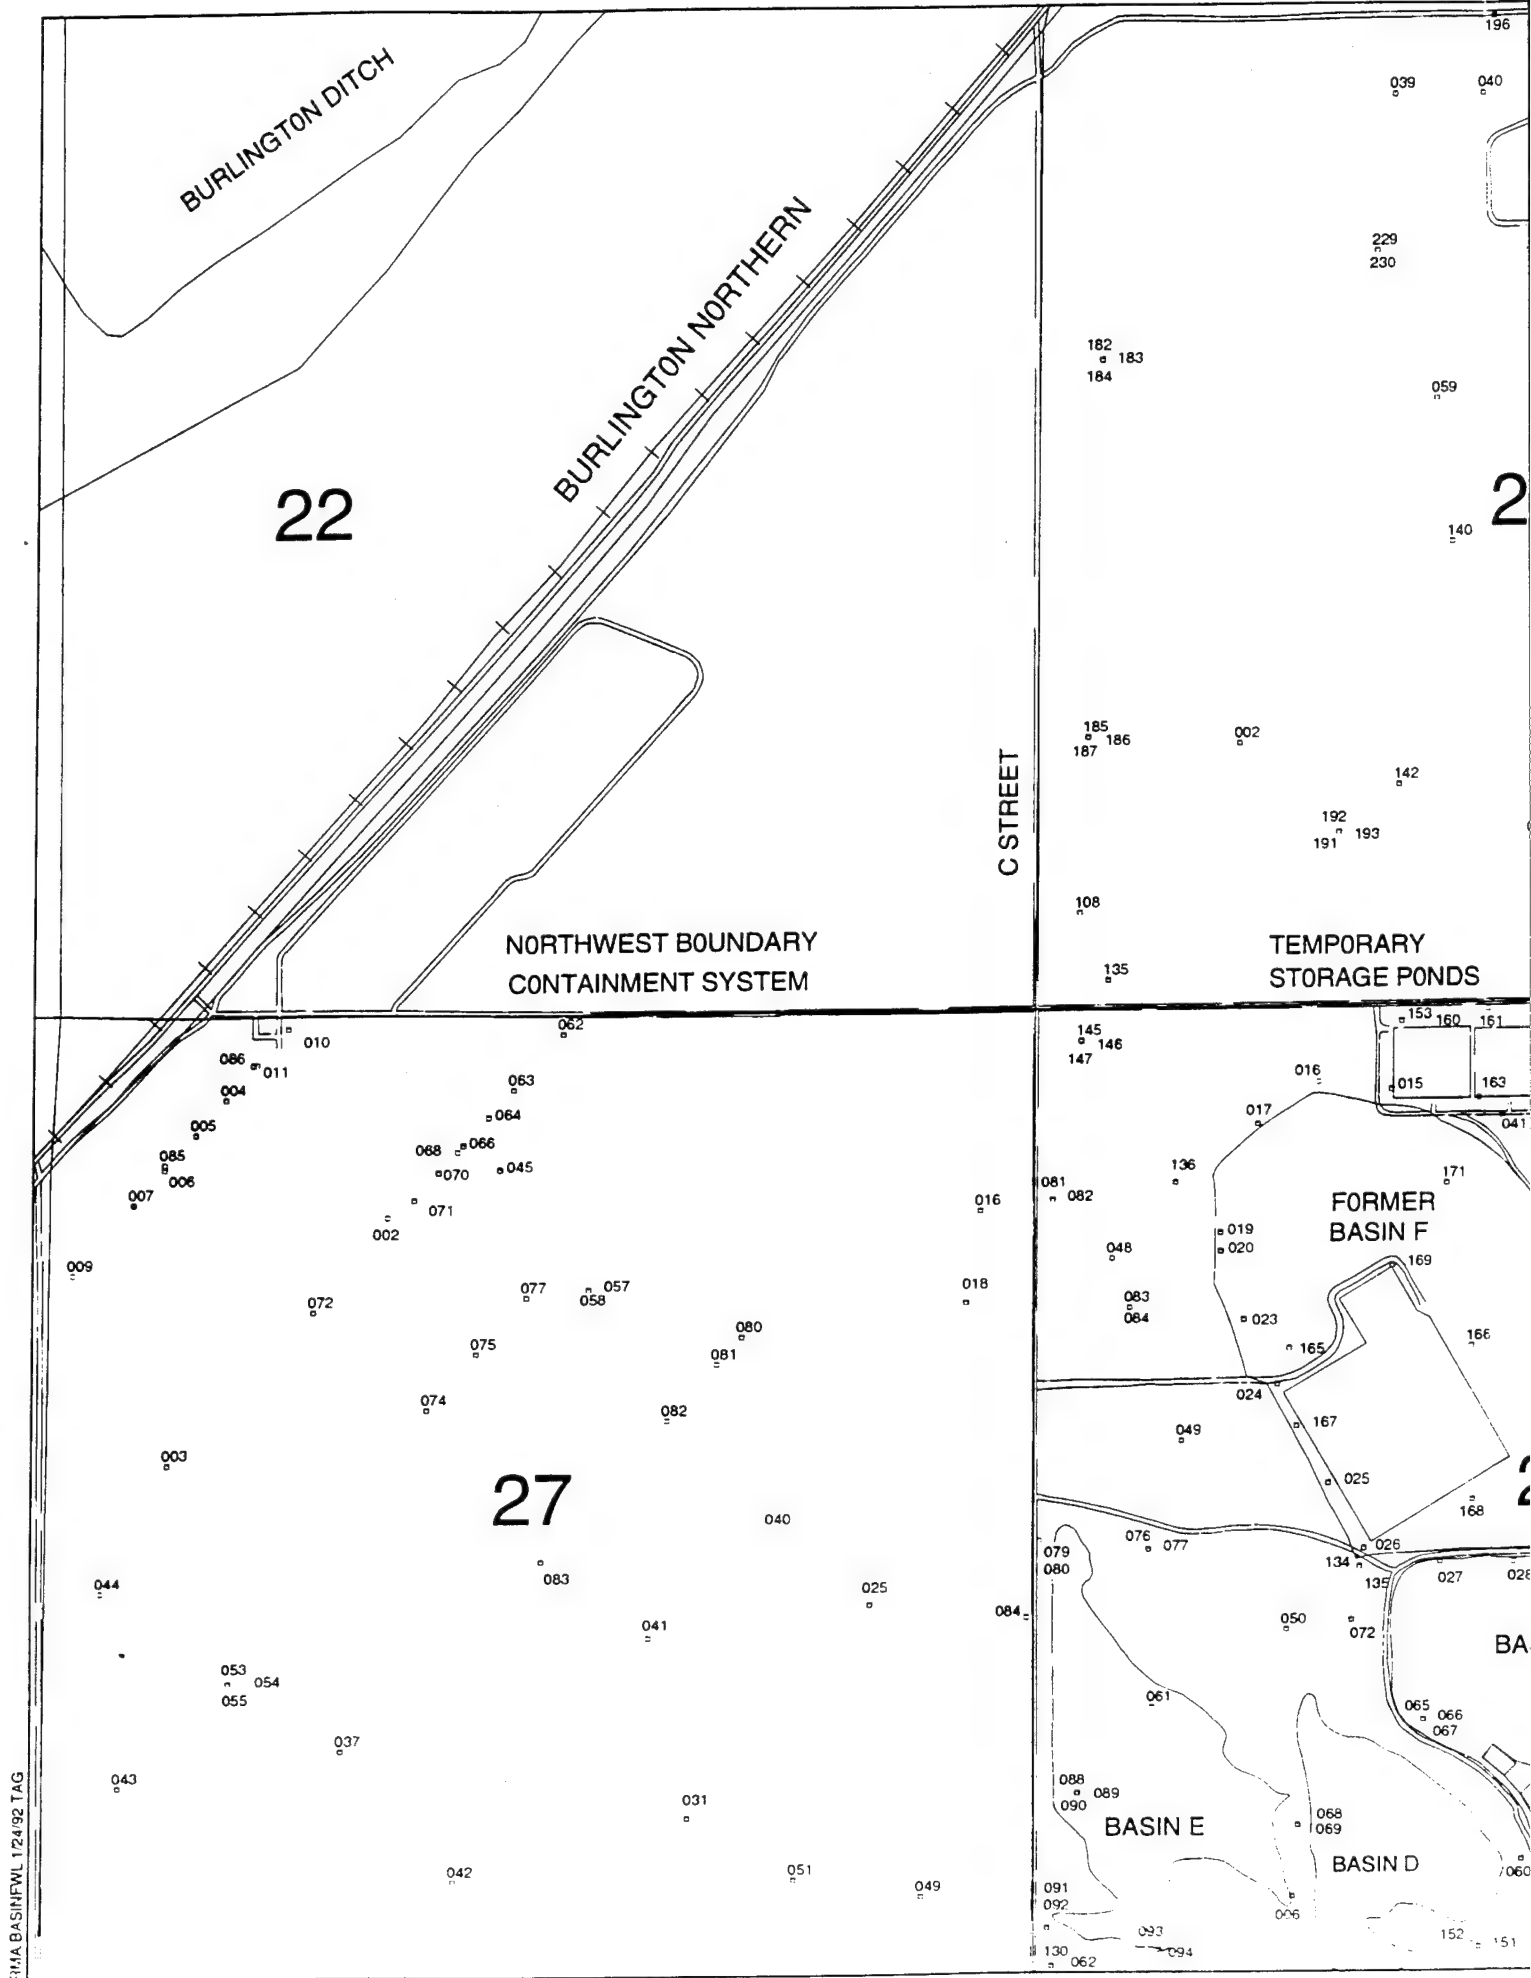

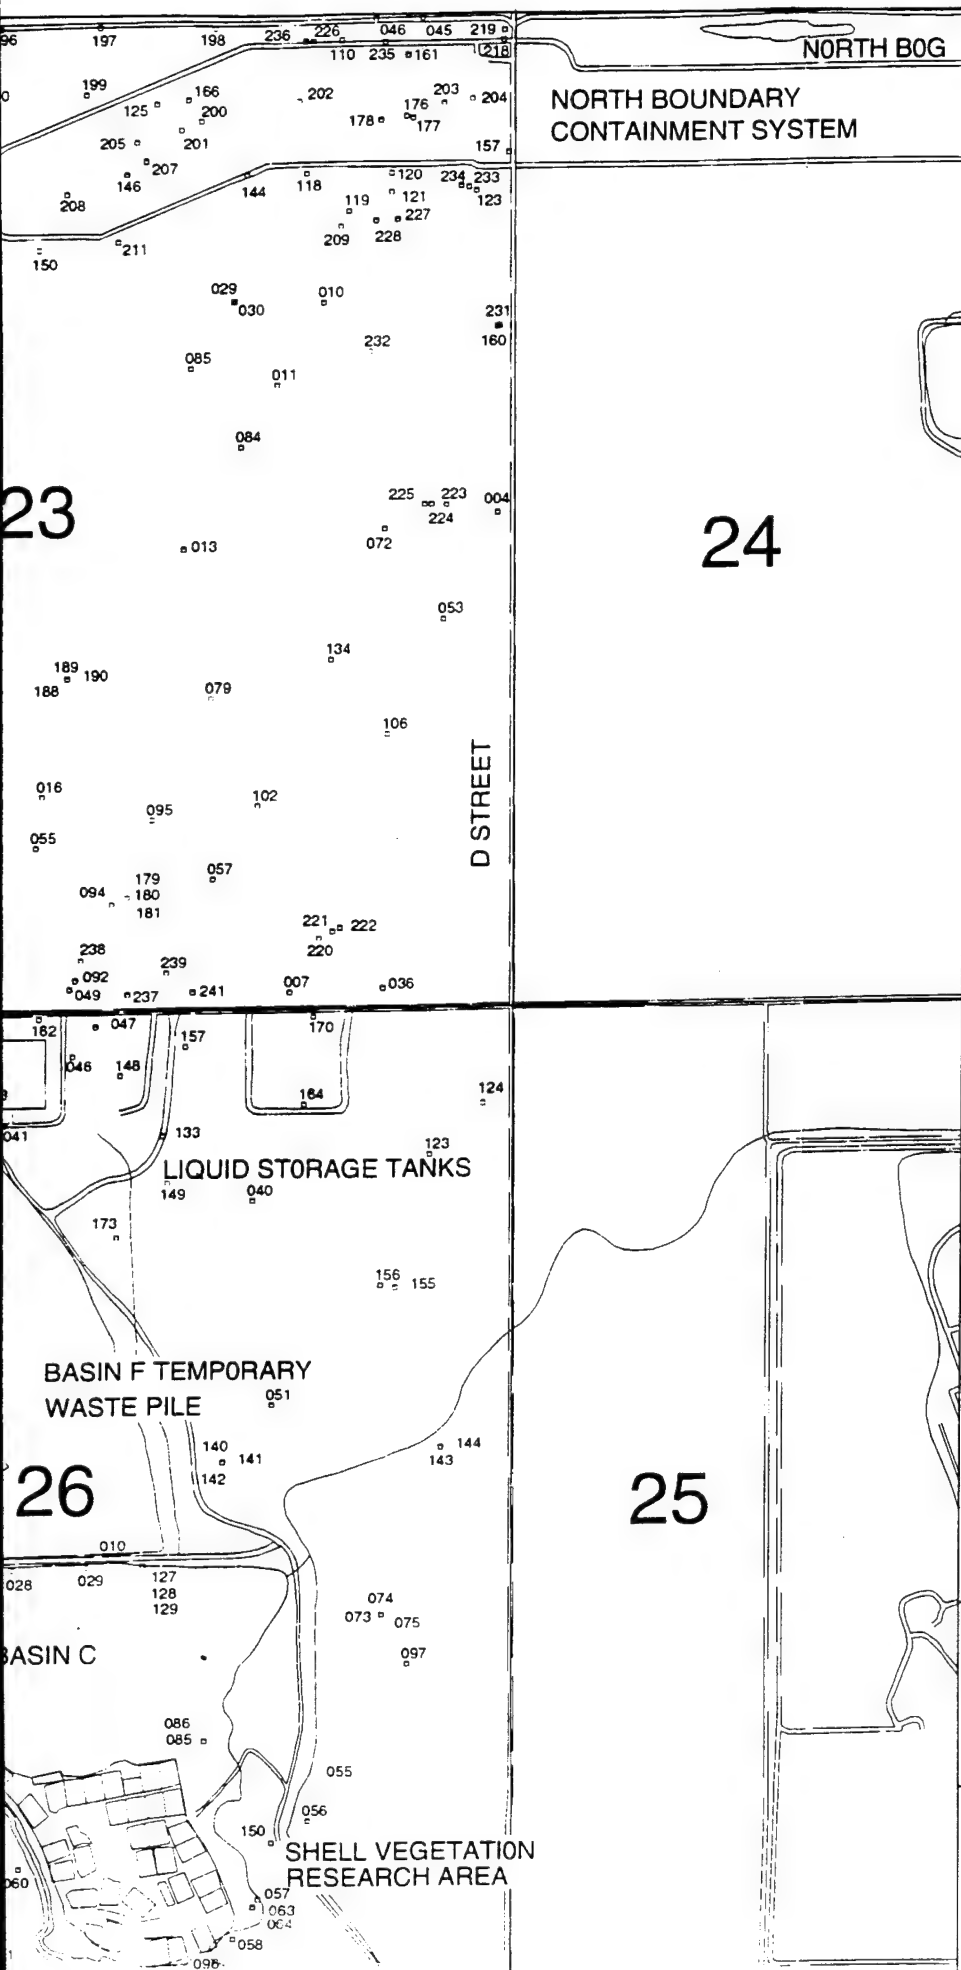

EXPLANATION

WELL LOCATION USED FOR
WATER LEVEL MEASUREMENT




Prepared for:
Program Manager for
Rocky Mountain Arsenal

Figure 2.2
Water-Level Monitoring Well
Locations for Basin F IRA Area

3.0 SURFACE-WATER MONITORING PROGRAM

Water quality of surface water in the Basin F IRA area will be assessed by analyzing samples collected at the gaging station shown in Figure 3.1. The frequency of sampling will depend on the availability of surface-water runoff. Runoff is expected only during high precipitation events or during significant snow melt. Four sampling events are expected per year. Water quantity will be monitored on a continuous basis utilizing an electronic monitoring device with a Parshall flume and stilling well (Rantz and others, 1982).

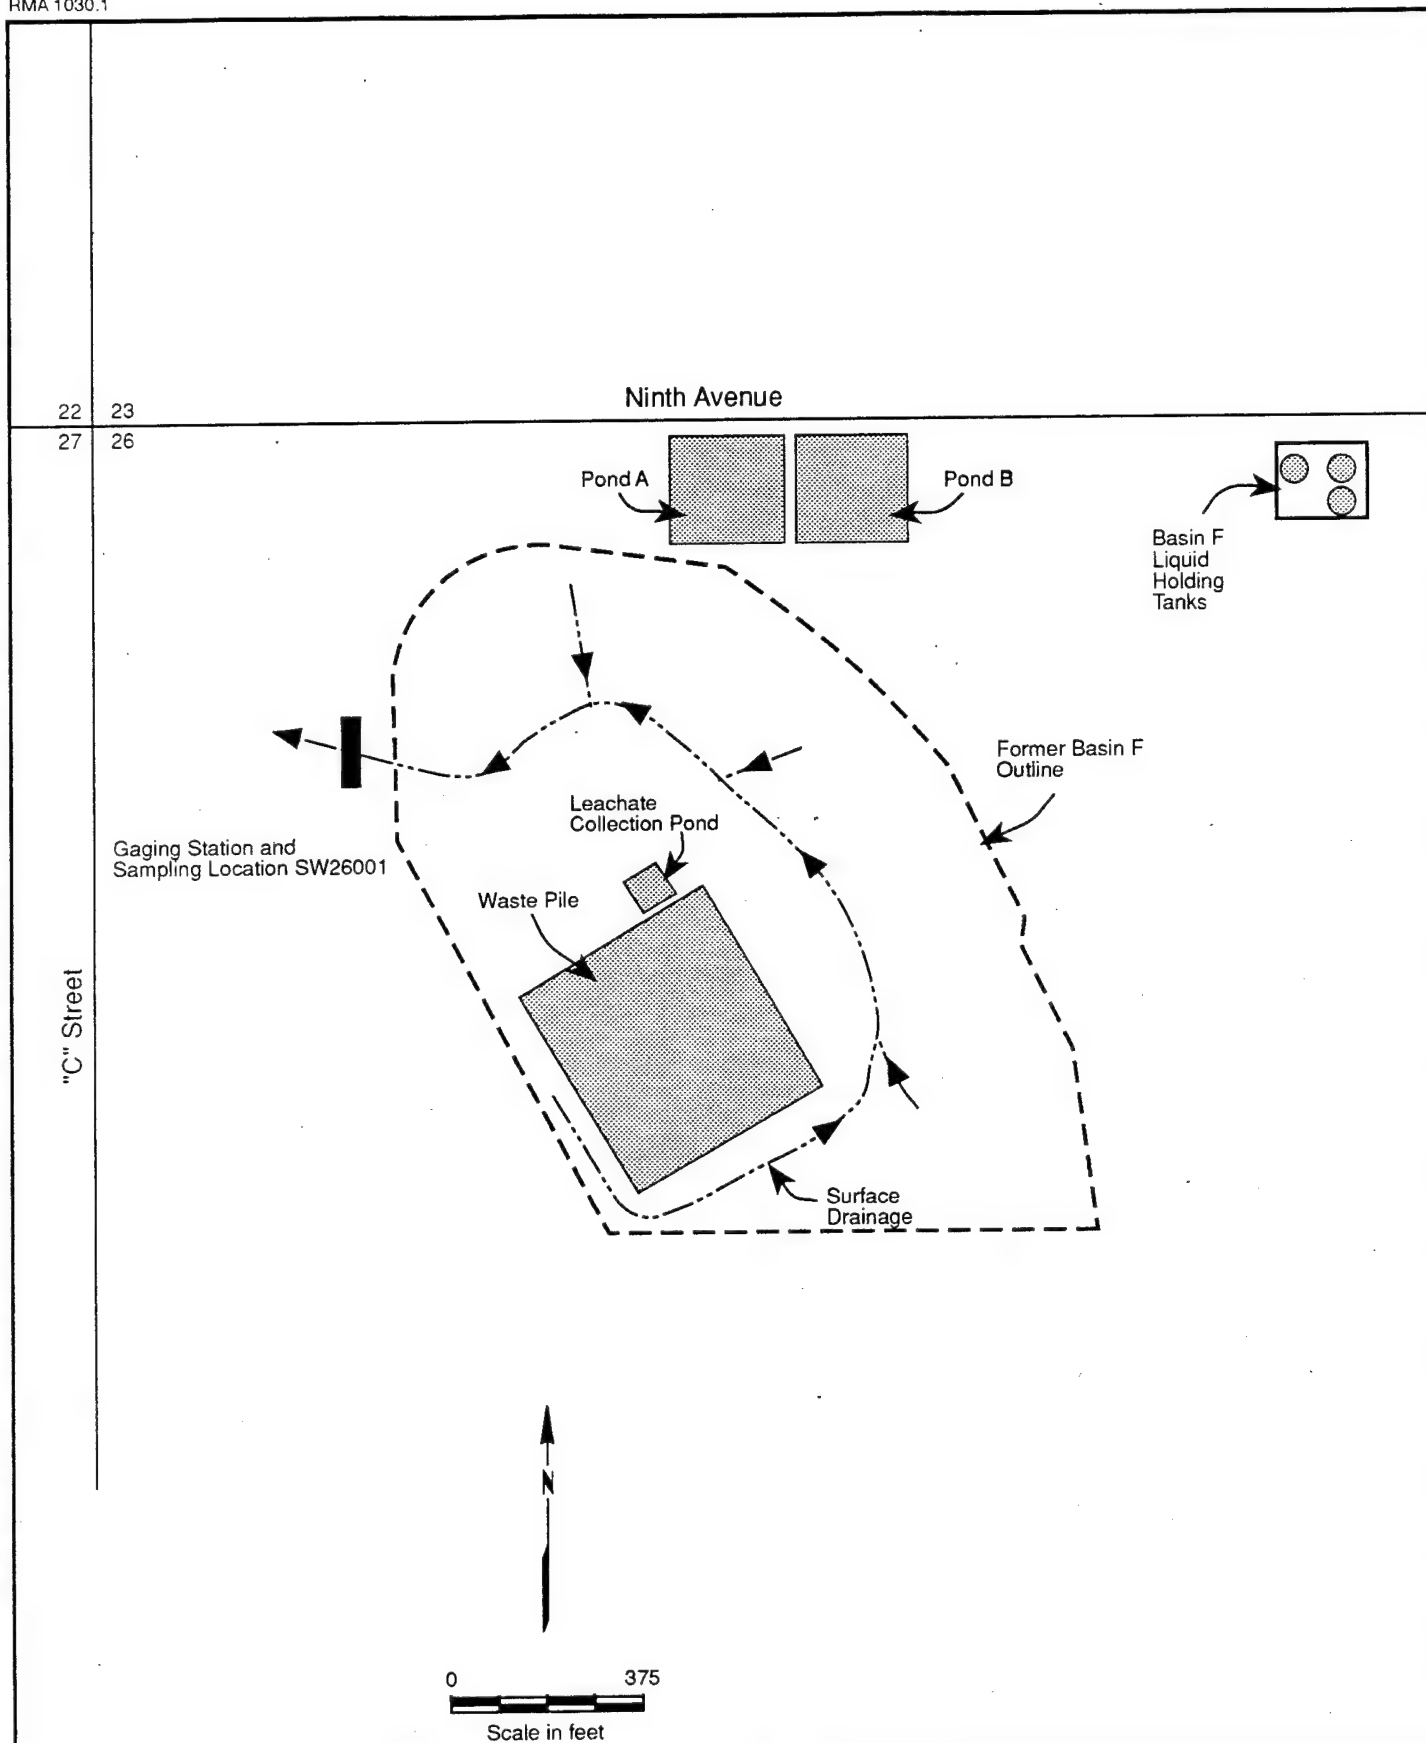

Prepared for:
Program Manager for
Rocky Mountain Arsenal
Commerce City, Colorado

Figure 3.1
BASIN F GAGING STATION

4.0 LABORATORY ANALYTICAL PROGRAM

Groundwater and surface-water samples collected from the Basin F IRA area will be analyzed for parameters listed in Table 4.1. This list may be modified for future sampling events on the basis of remedial investigation/feasibility study and CMP data interpretation, and on the basis of evaluation of the gas chromatography/mass spectroscopy (GC/MS) analysis of nontarget analytes. Any revisions to the analytical program will be incorporated into a revised work plan.

In addition to the quantitative analytical results obtained for target analyte list parameters, the laboratory analytical program will include a semiquantitative GC/MS analysis of randomly selected groundwater and surface-water samples. The GC/MS technique will be used to confirm those target analytes that can be detected by gas chromatography (GC) and indicate the presence of nontarget analytes. Consistent with prior practice, where nontarget analytes are repeatedly detected at elevated levels, action will be taken to identify the major compounds and evaluate them for incorporation into the target analyte list.

GC/MS analysis will be performed on approximately 10 percent of the groundwater and surface-water samples collected.

Table 4.1: Target Analyte List for Groundwater
and Surface-Water Sampling in the Basin F IRA Area
(Page 1 of 2)

ANALYSIS/METHODS/ANALYTES

Agent Products/HPLC

Thiodiglycol

Agent Products/IONCHROM

Isopropylmethylphosphonic acid

Metals/ICP

Cadmium
Chromium
Copper
Lead
Zinc

Organophosphorus Compounds/GCFPD

Diisopropylmethylphosphonate (DIMP)
Dimethylmethylphosphonate (DIMP)

Semivolatile Organic Compounds/GCMS

1,4-oxathiane
2,2'-bis(Para-chlorophenyl)-
1,1-dichloroethane
2,2'-bis(Para-chlorophenyl)-
1,1,1-trichloroethane
Aldrin
Atrazine
Chlordane
Chlorophenylmethyl sulfide
Chlorophenylmethyl sulfone
Chlorophenylmethyl sulfoxide
Dibromochloropropane
Dicyclopentadiene
Dieldrin
Diisopropylmethyl phosphonate
Dimethylmethyl phosphonate
Dithiane
Endrin
Hexachlorocyclopentadiene
Isodrin
Malathion
Parathion
Supona
Vapona

Organochlorine Pesticides/GCECD

2,2'-bis(Para-chlorophenyl)-
1,1-dichloroethane
2,2'-bis(Para-chlorophenyl)-
1,1,1-trichloroethane
Aldrin
Dieldrin
Endrin
Hexachlorocyclopentadiene
Isodrin

Organophosphorus Pesticides/GCNPDP

Atrazine
Malathion
Parathion
Supona
Vapona

Organosulphur Compounds/GCFPD

1,4-Oxathiane
Benzothiazole
p-Chlorophenylmethyl sulfide
p-Chlorophenylmethyl sulfone
p-Chlorophenylmethyl sulfoxide
Dimethyldisulfide
Dithiane

Volatile Aromatic Organic
Compounds/GCPID

Benzene
Ethylbenzene
m-Xylene
o- and p-Xylene
Toluene

Volatile Halogenated Organic
Compounds/GCCON

1,1-Dichloroethane
1,2-Dichloroethane
1,1-Dichloroethylene
1,1,1-Trichloroethane
1,1,2-Trichloroethane
Carbon tetrachloride

Table 4.1: Target Analyte List for Groundwater
and Surface-Water Sampling in the Basin F IRA Area
(Page 2 of 2)

Volatile Halogenated Organic
Compounds/GCCON (continued)

Chlorobenzene
Chloroform
Methylene chloride
Tetrachloroethylene
Trans-1,2-dichloroethylene
Trichloroethylene

Volatile Hydrocarbon Compounds/GCFID

Bicycloheptadiene
Dicyclopentadiene (DCPD)
Methylisobutyl Ketone (MIBK)

Arsenic/AA

Dibromochloropropane/GCECD

Mercury/AA

Cyanide/Colorimetric

Anions/Ionchrom

Chloride
Fluoride
Sulfate

Cations/ICP

Calcium
Magnesium
Sodium
Potassium

Volatile Organic Compounds/GCMS

1,1-Dichloroethane
1,2-Dichloroethane
1,1,1-Trichloroethane
1,1,2-Trichloroethane
Benzene
Bicycloheptadiene
Carbon tetrachloride
Chlorobenzene
Chloroform
Dibromochloropropane
Dicyclopentadiene
Dimethyldisulfide
Ethylbenzene
m-Xylene
Methylene chloride
Methylisobutyl ketone
o- and p-Xylene
Tetrachloroethylene
Toluene
Trans-1,2-dichloroethylene
Trichloroethylene

Alkalinity

Conductivity

pH

Nitrate/Nitrite/Colorimetric

AA = Atomic Absorption Spectroscopy
GCCON = Gas Chromatography/Conductivity Detector
GCECD = Gas Chromatography/Electron Capture Detector
GCFID = Gas Chromatography/Flame Ionization Detector
GCFPD = Gas Chromatography/Flame Photometric Detector
GCMS = Gas Chromatography/Mass Spectrometry
GCNPD = Gas Chromatography/Nitrogen Phosphorous Detector
GCPID = Gas Chromatography/Photoionization Detector
HPLC = High Performance Liquid Chromatography
ICP = Inductively Coupled Argon Plasma Screen
IONCHROM = Ion Chromatography

20006,110.10 - CWMP
0912060392

5.0 MAINTENANCE PROGRAM

The maintenance program for the Basin F IRA area water monitoring activities will consist of maintaining existing monitoring wells and gaging stations. The maintenance program also includes replacement of existing wells that have been destroyed and installing new monitoring wells or gaging stations if required. Any new wells would be installed following guidelines required by PMRMA (U.S. Army Toxic and Hazardous Materials Agency [USATHAMA], 1987).

The need for maintenance activities will be evaluated after each water-level monitoring and water-quality sampling event. Maintenance problems identified will be corrected before the next sampling event. If monitoring well maintenance is required, it will be limited to the following maintenance activities:

- Repair of casing stickups
- Installation of protector casings
- Installation of steel marker posts
- Installation and/or repair of surface seals
- Resurvey of repaired well sites
- Installation of permanent identification tags
- Installation of replacement well caps
- Clearance of weeds from the area around the wells
- Installation of weed barrier mats
- Redevelopment of monitoring wells
- Removal of accumulated sediment in well casing

Maintenance of the surface-water gaging station will include the following:

- Weekly inspection
- Resurvey of any repaired installations
- Installation of permanent identification tags
- Clearance of weeds from the area around the gaging station

- Removal of accumulated channel debris
- Removal of sediment or debris in the stilling well and intake pipes

6.0 HEALTH AND SAFETY

The health and safety procedures followed by the site investigation teams during sampling activities at the Basin F IRA area are described in the CMP Health and Safety Plan (Stollar and others, 1988a) or health and safety plans that will be developed and identified by PMRMA as components of future PMRMA water monitoring programs.

7.0 DATA MANAGEMENT

The CMP Data Management Plan (Stollar and others, 1988b) outlines the general procedures to be utilized for the Basin F IRA area. Data collected and analyzed from the Basin F IRA area will be added to the overall PMRMA database. The Data Management Plan will be revised, if needed, as a component of future PMRMA water monitoring programs.

8.0 QUALITY ASSURANCE

The quality assurance procedures to be followed for the Basin F IRA area water monitoring activities are described in the CMP Project Quality Assurance Plan (Stollar and others, 1988c) and are in accordance with current PMRMA requirements. This plan includes project quality assurance/quality control (QA/QC) organization and responsibilities, approach to QA, laboratory certification, sampling, sample preparation, materials shipping and handling, chain-of-custody procedures, analysis, system control, instrument maintenance, recordkeeping, audits, corrective actions, and QC reports. The CMP Project QA Plan will be revised, if needed, as a component of future PMRMA water monitoring programs.

9.0 REPORTING AND DATA ASSESSMENT

Data collected in the Basin F IRA area from October 1991 through September 1992 will be assessed and reported in the Groundwater Monitoring Program 1992 annual report. The Groundwater Monitoring Program succeeds the CMP. The Basin F IRA area will be treated as a site-specific area; work products will describe hydraulic conditions and contaminant flow. Specific work products may include the following:

- Water-level contour maps
- Contaminant distribution or plume maps, where possible, for each analyte or for analyte groups
- Revised geologic maps based on additional geologic data
- Maps indicating any revisions in areas of unsaturated alluvium and the extent of inferred paleochannels, if necessary

The accompanying text for the work products listed above will include a hydrogeologic analysis and a contamination assessment to describe the rate of migration and extent of contamination in groundwater and surface water in the Basin F IRA area.

10.0 REFERENCES

Rantz, S.C., and others, 1982. USGS Water Supply Paper #2175, Volumes I and II, Measurement and Computation of Stream Flow.

Stollar, R.L., & Associates, Inc., and others, 1988a. Comprehensive Monitoring Plan Health and Safety Plan, Prepared for Program Manager, Rocky Mountain Arsenal.

Stollar, R.L., & Associates, Inc., and others, 1988b. Comprehensive Monitoring Plan Data Management Plan, Prepared for Program Manager, Rocky Mountain Arsenal.

Stollar, R.L., & Associates, Inc., and others, 1988c. Comprehensive Monitoring Plan Project Quality Assurance Plan, Prepared for Program Manager, Rocky Mountain Arsenal.

Stollar, R.L., & Associates, Inc., and others, 1989. Comprehensive Monitoring Program Annual Groundwater Report for 1988, Final Report, Prepared for Program Manager, Rocky Mountain Arsenal. June, RIC #89213R01.

Stollar, R.L., & Associates, Inc., and others, 1990a. Comprehensive Monitoring Program Annual Groundwater Report for 1989, Final Report, Version 2.0, Prepared for Program Manager, Rocky Mountain Arsenal. June, RIC #90231R01.

Stollar, R.L., & Associates, Inc., and others, 1990b. Comprehensive Monitoring Program Final Surface Water Data Assessment Report for 1988, Final Report, Version 2.0, May, RIC #90280R03.

Stollar, R.L., & Associates, Inc., and others, 1991. Comprehensive Monitoring Program Annual Ground Water Report 1990, Final Report, Version 1.1, Prepared for Program Manger, Rocky Mountain Arsenal, August. RIC #91234R01.

Stollar, R.L., & Associates, Inc., and others, 1992. Comprehensive Monitoring Program Final Surface Water Data Assessment Report for 1989, Final Report, Version 2.0, Prepared for Program Manger, Rocky Mountain Arsenal. RIC #921343R01.

U.S. Army Toxic and Hazardous Materials Agency, 1987. Geotechnical Requirements for Drilling, Monitoring Wells, Data Acquisitions, and Reports: USATHAMA, Aberdeen Proving Ground, Maryland, March.